

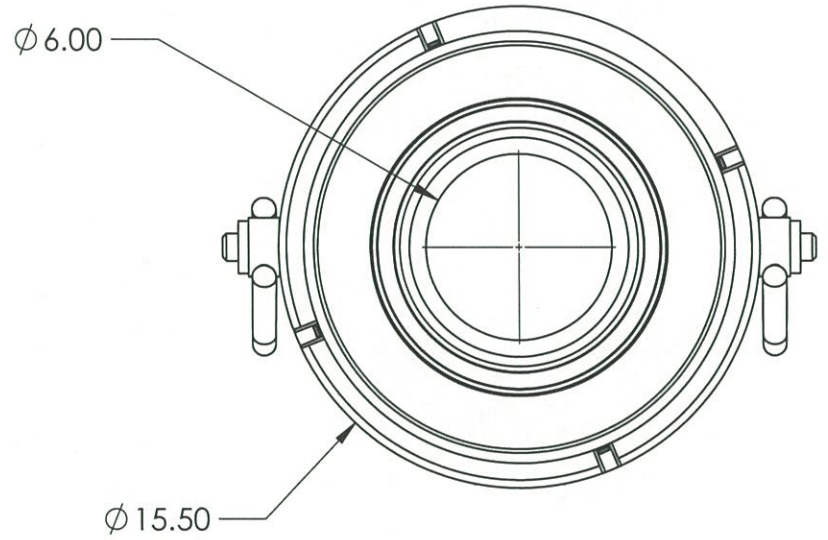
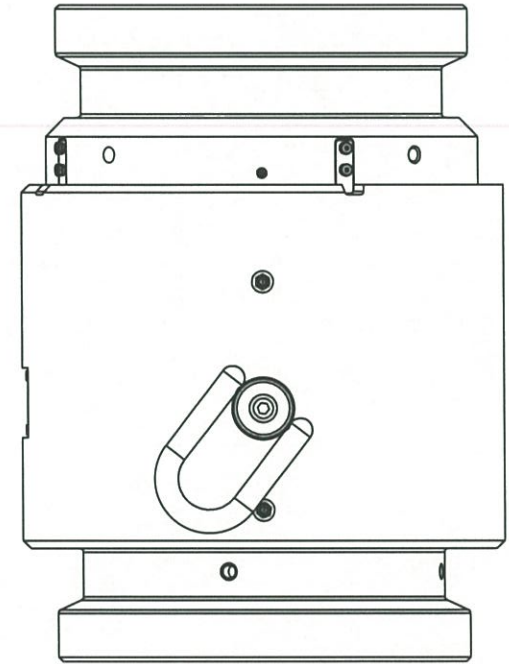


REVISIONS				
REV.	DESCRIPTION	ECO #	DATE	APPROVED
X1	PRE-RELEASE	2018-042	7/27/2018	
A1	RELEASE	2018-103	9/13/2018	

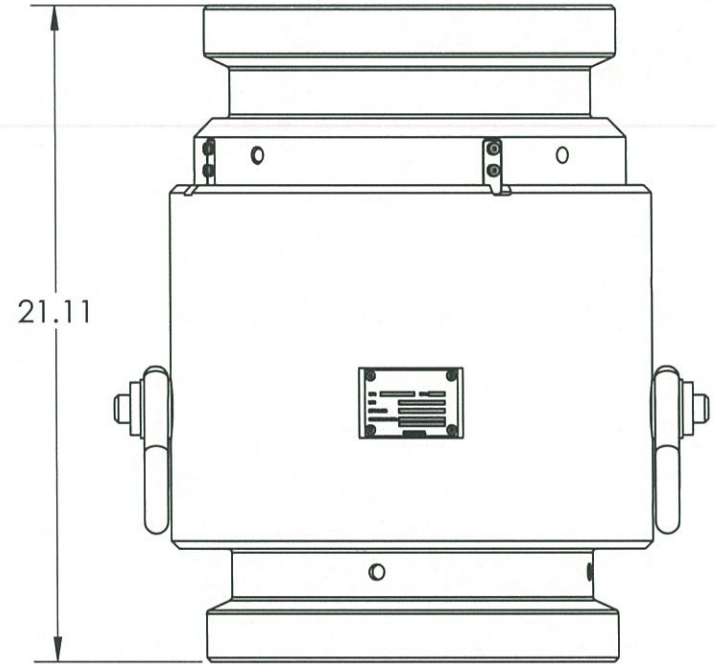

SPARE PARTS


PART NO.	DESCRIPTION	QTY
TSC-02480-SK	SEAL KIT	1
TSC-02480-BR	BEARING KIT	1
SE-1112	GREASE	5

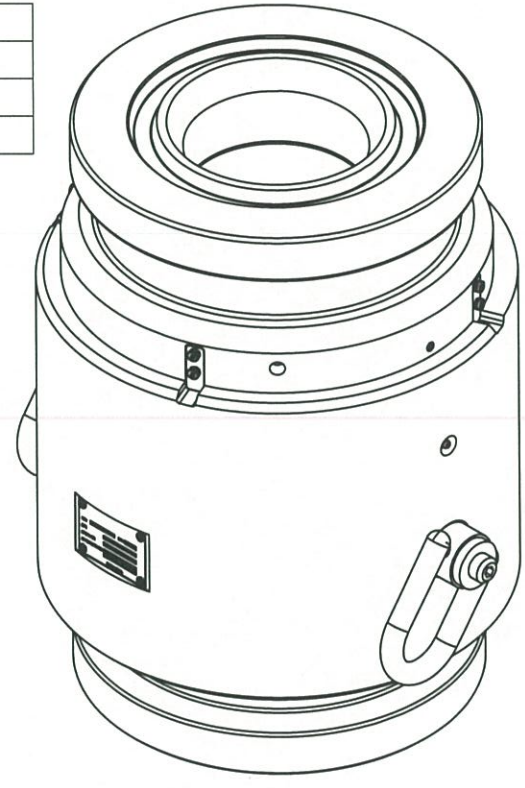

- NOTES:
- DESIGNED FOR DRILLING MUD LINES
 - WORKING PRESSURE - 2K PSI
 - TESTED AT 1.5 TIMES WORKING PRESSURE
 - 7-1/16" 5M, API 16A HUB WITH BX-156 RING GROOVES ON BOTH ENDS.
 - MATERIAL OF CONSTRUCTION: STAINLESS STEEL AND LOW ALLOY STEEL

- SPECIFICATIONS:
- MAX ROTATIONAL TORQUE: @ 0 PSI < 500 LB. FT. / @ MWP < 2,500 LB. FT.
 - MAX AXIAL LOAD: 19,500 Kg
 - MAX BENDING MOMENT: @MWP 19 kNm
 - SWIVEL IS DESIGNED TO A COMBINED LOAD OF 2,000 PSI, 19,500 kg AXIAL LOAD, AND 19 kNm BENDING MOMENT.
 - SUITABLE FOR 50 METERS SUBSEA
 - DESIGNED TO API 6A AND 16A
 - MEETS NACE MR-0175 FOR H2S SERVICE

PROPRIETARY AND CONFIDENTIAL:
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF THE SUBSEA COMPANY INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF THE SUBSEA COMPANY INC IS PROHIBITED.

3RD ANGLE PROJECTION:


INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5

WORKMANSHIP STANDARD PER WI 751-001

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES

WEIGHT: 695.34 LBS.

	NAME	DATE
DRAWN	J.W.	11/13/2018
CHECKED	D.S.	11/14/18
APPROVED	[Signature]	11-15-18

THE SUBSEA COMPANY THE SUBSEA COMPANY INC

SIZE: **B** TITLE: 6" BORE, HUB BY HUB, 7-1/16" 5K API 16A HUB, BX-156, 2K MWP REV **A1**

DWG. NO. TSC-02480-GA SHEET 1 OF 1